
Uniform Type Identifiers Overview

[Carbon > Data Management](#)



2008-04-08



Apple Inc.
© 2004, 2008 Apple Inc.
All rights reserved.

No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, mechanical, electronic, photocopying, recording, or otherwise, without prior written permission of Apple Inc., with the following exceptions: Any person is hereby authorized to store documentation on a single computer for personal use only and to print copies of documentation for personal use provided that the documentation contains Apple's copyright notice.

The Apple logo is a trademark of Apple Inc.

Use of the "keyboard" Apple logo (Option-Shift-K) for commercial purposes without the prior written consent of Apple may constitute trademark infringement and unfair competition in violation of federal and state laws.

No licenses, express or implied, are granted with respect to any of the technology described in this document. Apple retains all intellectual property rights associated with the technology described in this document. This document is intended to assist application developers to develop applications only for Apple-labeled computers.

Every effort has been made to ensure that the information in this document is accurate. Apple is not responsible for typographical errors.

Apple Inc.
1 Infinite Loop
Cupertino, CA 95014
408-996-1010

Apple, the Apple logo, AppleScript, Carbon, ColorSync, eMac, iTunes, Keynote, Mac, Mac OS, Objective-C, Quartz, QuickTime, and TrueType are trademarks of Apple Inc., registered in the United States and other countries.

Spotlight is a trademark of Apple Inc.

NeXT is a trademark of NeXT Software, Inc., registered in the United States and other countries.

Adobe, Acrobat, and PostScript are trademarks or registered trademarks of Adobe Systems Incorporated in the U.S. and/or other countries.

Java and all Java-based trademarks are trademarks or registered trademarks of Sun Microsystems, Inc. in the U.S. and other countries.

UNIX is a registered trademark of The Open Group

Simultaneously published in the United States and Canada.

Even though Apple has reviewed this document, APPLE MAKES NO WARRANTY OR REPRESENTATION, EITHER EXPRESS OR IMPLIED, WITH RESPECT TO THIS DOCUMENT, ITS QUALITY, ACCURACY, MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE. AS A RESULT, THIS DOCUMENT IS PROVIDED "AS IS," AND YOU, THE READER, ARE ASSUMING THE ENTIRE RISK AS TO ITS QUALITY AND ACCURACY.

IN NO EVENT WILL APPLE BE LIABLE FOR DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES RESULTING FROM ANY DEFECT OR INACCURACY IN THIS DOCUMENT, even if advised of the possibility of such damages.

THE WARRANTY AND REMEDIES SET FORTH ABOVE ARE EXCLUSIVE AND IN LIEU OF ALL OTHERS, ORAL OR WRITTEN, EXPRESS OR IMPLIED. No Apple dealer, agent, or employee is authorized to make any modification, extension, or addition to this warranty.

Some states do not allow the exclusion or limitation of implied warranties or liability for incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Contents

Introduction **Introduction to Uniform Type Identifiers Overview** 7

Who Should Read This Document? 7

Organization of This Document 7

Chapter 1 **Uniform Type Identifier Concepts** 9

What Is a Uniform Type Identifier? 9

 The UTI Character Set 10

 The UTI Syntax 10

 Conformance 11

 Dynamic Type Identifiers 13

Identifier Tags 13

Declaring UTIs 13

Chapter 2 **Adopting Uniform Type Identifiers** 17

Guidelines for UTI Usage 17

 Adding UTI Support to Applications 17

 Declaring Your Own UTIs 17

An Overview of UTI Functions 18

 Testing for Equality and Conformance 18

 Manipulating Tags 18

 Converting OStype Identifiers 19

 Accessing UTI Information 19

Chapter 3 **System-Declared Uniform Type Identifiers** 21

Document Revision History 33

Figures and Tables

Chapter 1 **Uniform Type Identifier Concepts 9**

Figure 1-1	A conformance hierarchy	11
Figure 1-2	Physical and functional hierarchies	12
Table 1-1	Property list keys for uniform type identifiers	15

Chapter 3 **System-Declared Uniform Type Identifiers 21**

Table 3-1	System-defined uniform type identifiers	21
Table 3-2	Uniform type identifiers for alternate tags	30
Table 3-3	Imported uniform type identifiers	30

Introduction to Uniform Type Identifiers

Overview

One of the challenges facing Mac OS X application developers is the proliferation of methods to identify types of data. For example, some text files may be assigned a 'TEXT' file type (as originally designed for Mac OS 9 and earlier), while others may simply have a `.txt` filename extension. Some may have the `.text` extension instead. In addition, some file types might be subsets of other types; an application that opens all `.txt` files should probably also be able to open those with a `.html` extension. Determining all the possible files an application could read could become impossible. The user experience then suffers, with users not understanding why an application can open one text file but not another.

To solve this problem, Apple has defined a syntax for special data identifiers called **uniform type identifiers**. Each UTI provides a unique identifier for a particular file type, data type, directory or bundle type, and so on. In addition, other type identifier namespaces for a particular type can be grouped under one UTI, with utility functions available to translate from one format to another.

Who Should Read This Document?

This document is for all Mac OS X application developers that need to create or otherwise manipulate data that may be exchanged with other applications or services. For example, applications often need to be aware of the type of data they handle when:

- Displaying, or manipulating, files, bundles, or folders
- Accessing streaming data
- Copying and pasting between documents or applications
- Dragging and dropping between applications
- Converting data or file contents using the Translation Manager

Support for uniform type identifiers is available in Mac OS X v10.3 and later.

Organization of This Document

This document is organized into the following chapters:

- [“Uniform Type Identifier Concepts”](#) (page 9) describes the syntax and usage of UTIs.
- [“Adopting Uniform Type Identifiers”](#) (page 17) describes how to adopt UTIs in your applications.
- [“System-Declared Uniform Type Identifiers”](#) (page 21) lists UTIs declared by the system.

INTRODUCTION

Introduction to Uniform Type Identifiers Overview

Uniform Type Identifier Concepts

Uniform type identifiers (UTIs) provide a unified way to identify data handled within the system, such as documents, pasteboard data, and bundles. This chapter describes the concepts behind UTIs and shows how to specify them in your application bundles.

What Is a Uniform Type Identifier?

A uniform type identifier is a string that uniquely identifies a class of entities considered to have a “type.” For example, for a file or other stream of bytes, “type” refers to the format of the data. For entities such as packages and bundles, “type” refers to the internal structure of the directory hierarchy. Most commonly, a UTI provides a consistent identifier for data that all applications and services can recognize and rely upon, eliminating the need to keep track of all the existing methods of tagging data. Currently, for example, a JPEG file might be identified by any of the following methods:

- A four-character file type code (an `OSType`) of 'JPEG'
- A filename extension of `.jpg`
- A filename extension of `.jpeg`
- A MIME type of `image/jpeg`

A UTI replaces all these incompatible tagging methods with the string `public.jpeg`. This string identifier is fully compatible with any of the older tagging methods, and you can call utility functions to translate from one to the other. That is, for a given UTI, you can generate the equivalent `OSType`, MIME type, or filename extension, and vice versa.

Because UTIs can identify any class of entity, they are much more flexible than the older tagging methods; you can also use them to identify any of the following entities:

- Pasteboard data
- Folders (directories)
- Translatable types (as handled by the Translation Manager)
- Bundles
- Frameworks
- Streaming data
- Aliases and symbolic links

In addition, you can define your own UTIs for application-specific use. For example, if your application uses a special document format, you can declare a UTI for it. Third-party applications or plug-ins that want to support your format can then use that UTI to identify your files.

The UTI Character Set

A uniform type identifier is a Unicode string that usually contains characters in the ASCII character set. However, only a subset of the ASCII characters are permitted. You may use the Roman alphabet in upper and lower case (A–Z, a–z), the digits 0 through 9, the dot (“.”), and the hyphen (“-”). This restriction is based on DNS name restrictions, set forth in RFC 1035.

Uniform type identifiers may also contain any of the Unicode characters greater than U+007F.

Important: Any illegal character appearing in a UTI string—for example, underscore (“_”), colon (“:”), or space (“ ”)—will cause the string to be rejected as an invalid UTI. At the API layer, no error is generated for invalid UTIs.

The UTI Syntax

Uniform type identifiers use the reverse-DNS format initially used to describe elements of the Java class hierarchy and now also used in Mac OS X for bundle identification. Some examples:

```
com.apple.quicktime-movie
com.mycompany.myapp.myspecialfiletype
public.html
com.apple.pict
public.jpeg
```

The UTI syntax ensures that a given identifier is unique without requiring a central authority to register or otherwise keep track of them. Note that the domain (`com`, `public`, and so on) is used only to identify the UTIs position in the domain hierarchy; it does not imply any grouping of similar types.

- The `public` domain is reserved for common or standard types that are of general use to most applications:

```
public.text
public.plain-text
public.jpeg
public.html
```

UTIs with the `public` domain are called public identifiers. Currently only Apple can declare public identifiers.

- The `dyn` domain is reserved for special dynamic identifiers. See [“Dynamic Type Identifiers”](#) (page 13) for more information.
- All other domains are available for use by third parties. Typically, identifiers declared by companies will begin with the `com` domain.

```
com.apple.quicktime-movie
com.yoyodyne.buckybits
```

You declare UTIs in the `Info.plist` file of a bundle. See [“Declaring UTIs”](#) (page 13) for more information. As of Mac OS X v10.4, you can declare UTIs in any of the following:

- Application bundles
- Spotlight Importer bundles


- Automator action bundles

Conformance

A key advantage of uniform type identifiers over other type identification methods is that they are declared in a conformance hierarchy. A conformance hierarchy is analogous to a class hierarchy in object-oriented programming. Instead of “type A conforms to type B,” you can also think of this as “all instances of type A are also instances of type B.”

Figure 1-1 (page 11) shows a conformance hierarchy for some uniform type identifiers.

Figure 1-1 A conformance hierarchy

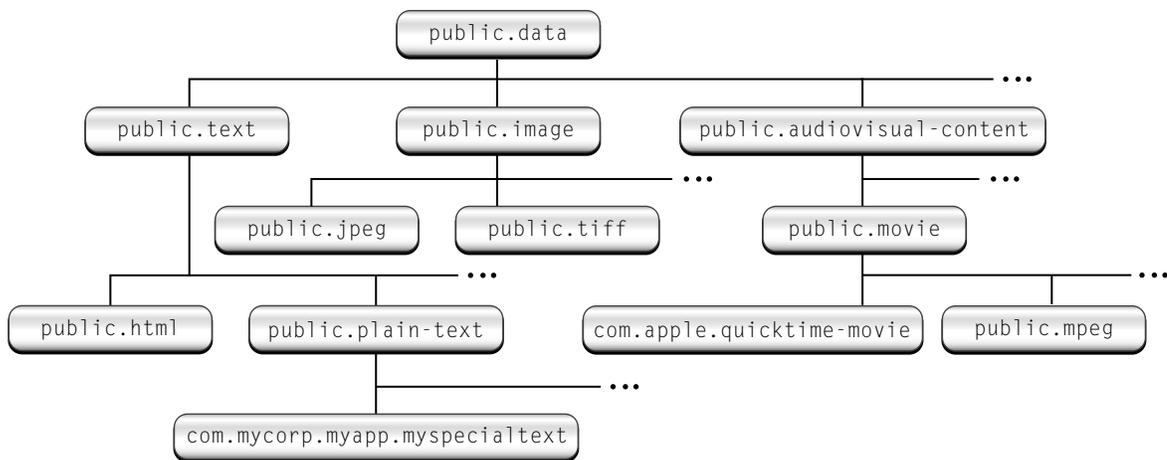

For example, the UTI `public.html`, which defines HTML text, conforms to the base text identifier, `public.text`. In this case, conformance lets applications that can open general text files identify HTML files as ones it can open as well.

You need to declare conformance only with your type’s immediate “superclass,” because the conformance hierarchy allows for inheritance between identifiers. That is, if you declare your identifier as conforming to the `public.tiff` identifier, it automatically conforms to identifiers higher up in the hierarchy, such as `public.image` and `public.data`.

The conformance hierarchy supports multiple inheritance. For example, the UTI for an application bundle (`com.apple.application-package`) conforms to both the generic bundle type (`com.apple.bundle`) and the packaged directory type (`com.apple.package`).


When specifying conformance for your UTI, your items should ideally conform to both a physical and functional hierarchy. That is, the conformance should specify both its physical nature (a directory, a file, and so on) as well as its usage (an image, a movie, and so on).

- A UTI in the physical hierarchy should conform through the inheritance hierarchy to `public.item`.
- A UTI in a functional hierarchy should conform through inheritance to a base UTI that is not `public.item`. For example, `public.content`, `public.executable` and `public.archive` are all examples of functional base UTIs.

While conforming to the functional hierarchy is not mandatory, doing so allows for better integration with system features. For example, Spotlight associates named attributes (title, authors, version, comments, and so on) with functional UTIs.

Figure 1-2 (page 12) shows examples of physical and functional hierarchies:

Figure 1-2 Physical and functional hierarchies

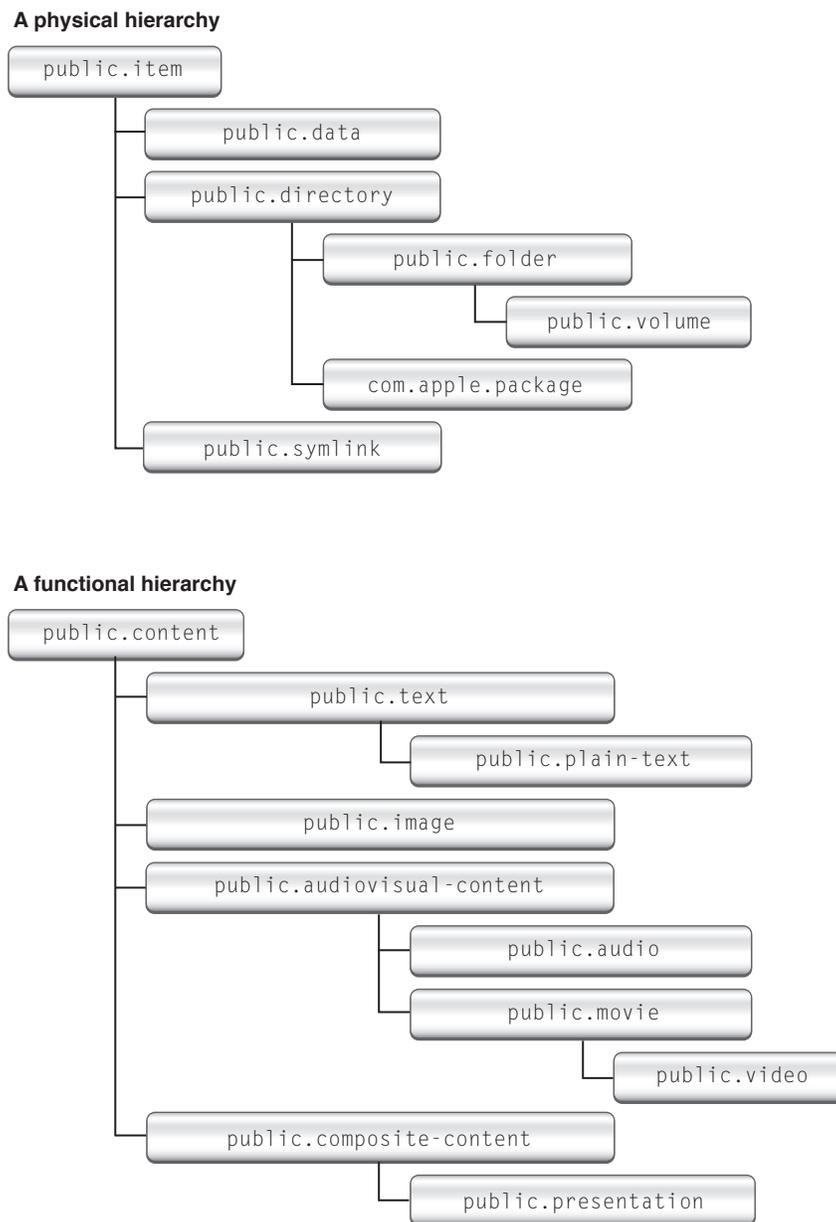

In some cases, you need to declare conformance to only one UTI to cover both hierarchies. For example, `public.text`, `public.image` and `public.audiovisual-content` conform to both `public.data` (physical) and `public.content` (functional), so conforming (directly or indirectly) to one of these items covers both hierarchies.

Conformance gives your application much more flexibility in determining what types it is compatible with; not only do you avoid writing lots of conditional code, your application can be compatible with types that you had never anticipated.

Dynamic Type Identifiers

Sometimes you may run across an data type that does not have a UTI declared for it. UTIs handle this case transparently by creating a dynamic identifier for that type. For example, say your application finds a `NSPasteboard` type that it does not recognize. Using the utility functions, it can still convert the type to a UTI that it can then pass around.

Dynamic identifiers have the domain `dyn`, with the rest of the string that follows being opaque. You handle dynamic identifiers just as any other UTI, and you can extract the original identifier tag using utility functions. You can think of a dynamic identifier as a UTI-compatible wrapper around an otherwise unknown filename extension, MIME type, `OStype`, and so on.

Identifier Tags

Each UTI can have one or more tags associated with it. These tags indicate alternate methods of type identification, such as filename extension, MIME type, or `NSPasteboard` type. You use these tags to assign specific extensions, MIME types, and so on, as being equivalent types in a UTI declaration.

For example, the `public.jpeg` identifier declaration includes one `OStype` tag (`'JPEG'`) and two filename extension tags (`.jpg` and `.jpeg`). These tags are then considered alternate identifiers for the `public.jpeg` type.

Essentially, you use the tags to group all the possible methods of identifying a type under one UTI. That is, a file with extension `.jpg` or `.jpeg`, or an `OStype` of `'JPEG'` are all considered to be of type `public.jpeg`.

Declaring UTIs

You declare uniform type identifiers in the `Info.plist` file of:

- An application bundle
- A Spotlight Importer bundle
- An Automator action bundle

In addition to declaring the UTI string, the declaration can contain any of the following properties:

- The type's tag specification, specifying all the alternate identifier tags that match this type
- A list of UTIs to which this identifier conforms
- The icon to use when displaying items of this type
- A user-readable string describing this identifier, which the containing bundle may localize (Available in Mac OS X v10.4 and later)

Your UTI declarations must be either imported or exported:

- An exported UTI declaration means that the type is available for use by all other parties. For example, an application that uses a proprietary document format should declare it as an exported UTI.
- An imported UTI declaration is used to declare a type that the bundle does not own, but would like to see available on the system. For example, say a video-editing program creates files using a proprietary format whose UTI is declared in its application bundle. If you are writing an application or plugin that can read such files, you must make sure that the system knows about the proprietary UTI, even if the actual video-editing application is not available. To do so, your application should redeclare the UTI in its own bundle but mark it as an imported declaration.

If both imported and exported declarations for a UTI exist, the exported declaration takes precedence over imported one.

Here is a sample declaration for the `public.jpeg` UTI, defined as an exported type, as you would find in a property list:

```
<key>UTExportedTypeDeclarations</key>
  <array>
    <dict>
      <key>UTTypeIdentifier</key>
      <string>public.jpeg</string>
      <key>UTTypeReferenceURL</key>
      <string>http://www.w3.org/Graphics/JPEG/</string>
      <key>UTTypeDescription</key>
      <string>JPEG image</string>
      <key>UTTypeIconFile</key>
      <string>public.jpeg.icns</string>
      <key>UTTypeConformsTo</key>
      <array>
        <string>public.image</string>
        <string>public.data</string>
      </array>
      <key>UTTypeTagSpecification</key>
      <dict>
        <key>com.apple.ostype</key>
        <string>JPEG</string>
        <key>public.filename-extension</key>
        <array>
          <string>jpeg</string>
          <string>jpg</string>
        </array>
        <key>public.mime-type</key>
        <string>image/jpeg</string>
      </dict>
    </dict>
  </array>
```

Table 1-1 (page 15) shows a list of the available property key lists that you use in UTI declarations.

Table 1-1 Property list keys for uniform type identifiers

Key	Value type	Description
UTExportedType-Declarations	array of dictionaries	An array of exported UTI declarations (that is, identifiers owned by the bundle's publisher).
UTImportedType-Declarations	array of dictionaries	An array of imported UTI declarations (that is, identifiers owned by another company or organization).
UTTypeIdentifier	string	The UTI for the declared type. This key is required for UTI declarations.
UTTypeTagSpecification	dictionary	A dictionary defining one or more equivalent type identifiers.
UTTypeConformsTo	array of strings	The UTIs to which this identifier conforms.
UTTypeIconFile	string	The name of the bundle icon resource to associate with this UTI.
UTTypeDescription	string	A user-visible description of this type (may be localized).
UTTypeReferenceURL	string	The URL of a reference document describing this type.

Adopting Uniform Type Identifiers

This chapter gives some guidelines for adopting uniform type identifiers in your application, and gives an overview of the utility functions used to manipulate UTIs.

Guidelines for UTI Usage

Adopting UTIs in your application is a two-part process. You should use UTIs whenever you need to identify or exchange data, and you should declare specific UTIs for any proprietary types your application uses.

Adding UTI Support to Applications

Apple is building in UTI support for most data-interchange needs. For example:

- The Pasteboard Manager and Translation Manager support UTIs in Mac OS X v10.3 and later.
- Navigation Services allows you to specify UTIs for file filtering in Mac OS X v10.4 and later.
- Launch Services supports UTI-based document claims in Mac OS X v10.4 and later.

If you have specific needs that are not addressed by the above, you can match types to UTIs in your own code. Typically this requires you to find a type with an alternate identifier (such as an `OStype`), create a UTI from that identifier, then check for conformance with UTIs defining the types your application can handle. For an example of how to do this, see Navigation Services Tasks in *Navigation Services Programming Guide*.

Important: When using system-defined UTIs in your code, you should use the constants defined in `UTCoreTypes.h` (in the Launch Services framework) when available, rather than the actual UTI strings. For example, pass `kUTTypeApplication` rather than `"com.apple.application"`. [“System-Declared Uniform Type Identifiers”](#) (page 21) lists these constants in addition to the UTI strings.

Declaring Your Own UTIs

If your application uses proprietary data formats, you should declare them in the `Info.plist` file of your application bundle. Some guidelines:

- Your UTI string must be unique. Following the reverse-DNS format beginning with `com.companyName` is a simple way to ensure uniqueness. While the system can support different UTI strings with the same specification, the reverse is not true.
- If your code relies on third-party UTI types that may not be present on the system, you should declare those UTIs as imported types in your bundle.

- Be sure to add conformance information if your proprietary type is a subtype of one or more existing types. In most cases you should not specify conformance to a nonpublic type, unless you are also declaring that type in your bundle. For a list of public and Apple-defined UTIs, see [“System-Declared Uniform Type Identifiers”](#) (page 21).

An Overview of UTI Functions

You can find the functions used to manipulate UTIs in `UTType.h` in the Launch Services framework.

Testing for Equality and Conformance

When testing to see if two UTIs are identical, you should always use the `UTTypeEqual` function rather than direct string comparison:

```
Boolean UTTypeEqual (
    CFStringRef inUTI1,
    CFStringRef inUTI2
);
```

The two UTIs are equal if

- the UTI strings are identical
- a dynamic identifier’s tag specification is a subset of the other UTI’s tag specification.

However, in many cases you want to determine whether one UTI is compatible with another, in which case you should check for conformance rather than equality:

```
Boolean UTTypeConformsTo (
    CFStringRef inUTI1,
    CFStringRef inUTI2
);
```

The `UTTypeConformsTo` function returns `true` if `inUTI1` conforms to `inUTI2`. Conformance relationships are transitive: if A conforms to B, and B conforms to C, then A conforms to C.

Manipulating Tags

Often to use UTIs effectively, you must be able to convert various other type identifiers (OSType, MIME, and so on) to UTIs and vice versa.

To convert an identifier to a UTI, you can use the `UTTypeCreatePreferredIdentifierForTag` function:

```
CFStringRef UTTypeCreatePreferredIdentifierForTag(
    CFStringRef inTagClass,
    CFStringRef inTag,
    CFStringRef inConformingToUTI
);
```

For the tag class, you pass one of the following tag class constants that define the alternate identifiers:

```
const CFStringRef kUTTagClassFilenameExtension;
const CFStringRef kUTTagClassMIMEMimeType;
const CFStringRef kUTTagClassNSPboardType;
const CFStringRef kUTTagClassOSType;
```

You can pass a UTI in the `inConformingToUTI` parameter as a hint, in case the given tag appears in more than one UTI declaration. For example, if you know that the filename extension tag is associated with a file, not a directory, you can pass `public.data` here, which causes the function to ignore any types with the same extension that conform to `public.directory`. Pass `NULL` for this parameter if you have no hints.

In the rare case that two or more types exist that have the same identifier, this function prefers public UTIs over others. If no declared UTI exists for the identifier, `UTTypeCreatePreferredIdentifierForTag` creates and returns a dynamic identifier.

If you want to obtain all the UTIs that correspond to a given identifier, you can call `UTTypeCreateAllIdentifiersForTag`:

```
CFArrayRef UTTypeCreateAllIdentifiersForTag(
    CFStringRef inTagClass,
    CFStringRef inTag,
    CFStringRef inConformingToUTI );
```

This function returns an array of UTIs that you can examine to determine which one to use.

If you want to create an alternate identifier from a UTI, you call the `UTTypeCopyPreferredTagWithClass` function:

```
CFStringRef UTTypeCopyPreferredTagWithClass(
    CFStringRef inUTI,
    CFStringRef inTagClass );
```

The preferred tag is the first one listed in the tag specification array for a given tag class.

Converting OSType Identifiers

The UTI utility functions assume that all alternate identifier tags can be represented as Core Foundation strings. However, because type `OSType` is integer-based rather than string-based, it may not be immediately obvious how to correctly translate between type `CFStringRef` and type `OSType`. To ensure error-free encoding and decoding of `OSType` identifiers, use the following conversion functions:

```
CFStringRef UTCreateStringForOSType( OSType inOSType );

OSType UTGetOSTypeFromString( CFStringRef inTag );
```

Note: For `OSType` values containing only printable 7-bit ASCII characters, you can still use the `CFSTR` macro with a four-character string literal (for example, `CFSTR("TEXT")`) to create a valid `OSType` tag.

Accessing UTI Information

To obtain a copy of a UTI's declaration, use the `UTTCopyDeclaration` function:

```
CFDictionaryRef UTTypeCopyDeclaration(  
    CFStringRef inUTI );
```

To obtain a URL to the bundle that contains the declaration for a given UTI, use the `UTTypeCopyDeclaringBundleURL` function:

```
CFURLRef UTTypeCopyDeclaringBundleURL(  
    CFStringRef inUTI );
```

To obtain the localized description of a given UTI, call the `UTTypeCopyDescription` function:

```
CFStringRef UTTypeCopyDescription(  
    CFStringRef inUTI );
```

System-Declared Uniform Type Identifiers

The following tables list uniform type identifiers (UTIs) that are declared by the system as of Mac OS X v10.4.

Note: These tables list only UTIs declared by the system. Other UTIs may be declared privately by Apple applications (Mail, for example) and third-party developers.

Table 3-1 lists UTIs that are defined by the system.

Table 3-1 System-defined uniform type identifiers

Identifier (Constant)	Conforms to	Tags	Comments
public.item (kUTTypeItem)	-		Base type for the physical hierarchy.
public.content (kUTTypeContent)	-		Base type for all document content.
public.composite-content (kUTTypeComposite-Content)	public.content		Base type for mixed content. For example, a PDF file contains both text and special formatting data.
public.data (kUTTypeData)	public.item		Base physical type for byte streams (flat files, pasteboard data, and so on).
public.database	-		Base functional type for databases.
public.calendar-event	-		Base functional type for scheduled events.
public.message (kUTTypeMessage)	-		Base type for messages (email, IM, and so on).

Identifier (Constant)	Conforms to	Tags	Comments
<code>public.presentation</code>	<code>public.composite-content</code>		Base type for presentations.
<code>public.contact</code> (<code>kUTTypeContact</code>)	-		Base type for contact information.
<code>public.archive</code> (<code>kUTTypeArchive</code>)	-		Base type for an archive of files and directories.
<code>public.disk-image</code> (<code>kUTTypeDiskImage</code>)	<code>public.archive</code>		Base type for items mountable as a volume.
<code>public.text</code> (<code>kUTTypeText</code>)	<code>public.content</code> , <code>public.data</code>		Base type for all text, including text with markup information (HTML, RTF, and so on).
<code>public.plain-text</code> (<code>kUTTypePlainText</code>)	<code>public.text</code>	<code>.txt</code> , <code>text/plain</code>	Text of unspecified encoding, with no markup. Equivalent to the MIME type <code>text/plain</code>
<code>public.utf8-plain-text</code> (<code>kUTTypeUTF8PlainText</code>)	<code>public.plain-text</code>	<code>'utf8'</code> , <code>NSStringPBoardType</code>	Unicode-8
<code>public.utf16-external-plain-text</code> (<code>kUTTypeUTF16External-PlainText</code>)	<code>public.plain-text</code>	<code>'ut16'</code>	Unicode-16 with byte-order mark (BOM), or if BOM is not present, an external representation byte order (big-endian).
<code>public.utf16-plain-text</code> (<code>kUTTypeUTF16PlainText</code>)	<code>public.plain-text</code>	<code>'utxt'</code>	Unicode-16, native byte order, with an optional byte-order mark (BOM).

Identifier (Constant)	Conforms to	Tags	Comments
<code>com.apple.traditional-mac-plain-text</code>	<code>public.plain-text</code>	'TEXT'	Classic Mac OS text.
<code>public.rtf</code> (<code>kUTTypeRTF</code>)	<code>public.text</code>	'RTF', <code>.rtf</code> , <code>text/rtf</code> , NeXT Rich Text Format 1.0 pasteboard type, <code>NSRTFPBoardType</code>	Rich Text.
<code>com.apple.ink.inktext</code> (<code>kUTTypeInkText</code>)	<code>public.data</code>		Opaque InkText data.
<code>public.html</code> (<code>kUTTypeHTML</code>)	<code>public.text</code>	'HTML', <code>.html</code> , <code>.htm</code> , <code>text/html</code> , Apple HTML pasteboard type	HTML text.
<code>public.xml</code> (<code>kUTTypeXML</code>)	<code>public.text</code>	<code>.xml</code> , <code>text/xml</code>	XML text.
<code>public.source-code</code> (<code>kUTTypeSourceCode</code>)	<code>public.plain-text</code>		Generic source code.
<code>public.c-source</code> (<code>kUTTypeCSource</code>)	<code>public.source-code</code>	<code>.c</code>	C source code.
<code>public.objective-c-source</code> (<code>kUTTypeObjectiveCSource</code>)	<code>public.source-code</code>	<code>.m</code>	Objective-C source code.
<code>public.c-plus-plus-source</code> (<code>kUTTypeCPlusPlusSource</code>)	<code>public.source-code</code>	<code>.cp</code> , <code>.cpp</code> , <code>.c++</code> , <code>.cc</code> , <code>.cxx</code>	C++ source code.
<code>public.objective-c-plus-plus-source</code> (<code>kUTTypeObjectiveCPlusPlusSource</code>)	<code>public.source-code</code>	<code>.mm</code>	Objective-C++ source code.
<code>public.c-header</code> (<code>kUTTypeCHeader</code>)	<code>public.source-code</code>	<code>.h</code>	C header file.
<code>public.c-plus-plus-header</code> (<code>kUTTypeCPlusPlusHeader</code>)	<code>public.source-code</code>	<code>.hpp</code> , <code>.h++</code> , <code>.hxx</code>	C++ header file.
<code>com.sun.java-source</code> (<code>kUTTypeJavaSource</code>)	<code>public.source-code</code>	<code>.java</code> , <code>.jav</code>	Java source code
<code>public.script</code>	<code>public.source-code</code>		Base type for scripting language source code.
<code>public.assembly-source</code>	<code>public.source-code</code>	<code>.s</code>	Assembly language source code.

Identifier (Constant)	Conforms to	Tags	Comments
com.apple.rez-source	public.source-code	.r	Rez source code.
public.mig-source	public.source-code	.defs, .mig	Mig definition source code.
com.apple.symbol-export	public.source-code	.exp	Symbol export list.
com.netscape.javascript-source	public.source-code, public.executable	.js, .jscrip, .javascript, text/javascript	JavaScript.
public.shell-script	public.script	.sh, .command	Shell script.
public.csh-script	public.shell-script	.csh	C-shell script.
public.perl-script	public.shell-script	.pl, .pm, text/x-perl-script	Perl script.
public.python-script	public.shell-script	.py, text/x-python-script	Python script.
public.ruby-script	public.shell-script	.rb, .rbw, text/ruby-script	Ruby script.
public.php-script	public.shell-script	.php, .php3, .php4, .ph3, .ph4, .phtml, text/x-php-script, text/php, application/php	PHP script.
com.sun.java-web-start	public.xml	.jnlp, application/x-java, jnlp-file, application/jnlp	Java web start.
com.apple.applescript.text	public.script	.applescript	AppleScript text.
com.apple.applescript.script	public.data	.sct, 'osas'	AppleScript.
public.object-code	public.data, public.executable	.o	Object code.
com.apple.mach-o-binary	public.data, public.executable		Mach-O binary.
com.apple.pef-binary	public.data, public.executable		PEF (CFM-based) binary
com.microsoft.windows-executable	public.data, public.executable	.exe, application/x-msdownload	Microsoft Windows application.
com.microsoft.windows-dynamic-link-library	public.data, public.executable	.dll, application/x-msdownload	Microsoft dynamic link library.
com.sun.java-class	public.data, public.executable	.class	Java class.

Identifier (Constant)	Conforms to	Tags	Comments
com.sun.java-archive	public.data, public.executable, public.archive	.jar , application/java-archive	Java archive.
com.apple.quartz-composer-composition	public.data, public.executable	.qtz , application/x-quartzcomposer	Quartz Composer composition.
org.gnu.gnu-tar-archive	public.data, public.archive	.gtar, application/x-gtar	GNU archive.
public.tar-archive	org.gnu.gnu-tar-archive	.tar, application/x-tar, application/tar	Tar archive.
org.gnu.gnu-zip-archive	public.data, public.archive	.gz, .gzip, application/x-gzip, application/gzip	Gzip archive.
org.gnu.gnu-zip-tar-archive	org.gnu.gnu-zip-archve	.tgz	Gzip tar archive.
com.apple.binhex-archive	public.data, public.archive	.hqx, application/mac-binhex40, application/mac-binhex, application/binhex	BinHex archive.
com.apple.machbinary-archive	public.data, public.archive	.bin, application/x-machbinary, application/machbinary	MacBinary archive.
public.url (kUTTypeURL)	public.data	'url '	Uniform Resource Locator.
public.file-url (kUTTypeFileURL)	public.url	'furl'	File URL.
public.url-name	-	'urln'	URL name.
public.vcard (kUTTypeVCard)	public.data, public.content	'vCrd', .vcf, .vcard, text/directory, text/vcard, text/x-vcard, Apple Vcard, pasteboard type	vCard (electronic business card).
public.image (kUTTypeImage)	public.data, public.content		Base type for images.
public.fax	public.image		Base type for fax images.
public.jpeg (kUTTypeJPEG)	public.image	'JPEG', .jpg, .jpeg, image/jpeg	JPEG image.
public.jpeg-2000 (kUTTypeJPEG2000)	public.image	'jp2 ', .jp2, image/jp2	JPEG 2000 image.

Identifier (Constant)	Conforms to	Tags	Comments
public.tiff (kUTTypeTIFF)	public.image	'TIFF', .tif, .tiff, image/tiff, NeXT TIFF v4.0 pasteboard type, NSTIFFPasteboardType	TIFF image.
public.camera-raw-image	public.image		Base type for digital camera raw image formats.
com.apple.pict (kUTTypePICT)	public.image	'PICT', .pic, .pct, .pict, image/pict, image/x-pict, image/x-macpict	PICT image
com.apple.macpaint-image	public.image	.png, 'PNTG'	MacPaint image.
public.png (kUTTypePNG)	public.image	'PNGf', .png, image/png	PNG image
public.xbitmap-image	public.image	.xbm, image/x-quicktime	X bitmap image.
com.apple.quicktime-image (kUTTypeQuickTimeImage)	public.image	'qtif', .qif, .qtif, image/x-quicktime	QuickTime image.
com.apple.icns (kUTTypeAppleICNS)	public.image	'icns', .icns	Mac OS icon image.
com.apple.txn.text-multimedia-data (kUTTypeTXNTextAndMultimediaData)	public.data, public.composite-content	'txn'	MLTE (Textension) format for mixed text and multimedia data.
public.audiovisual-content (kUTTypeAudioVisualContent)	public.data, public.content		Base type for any audiovisual content.
public.movie	public.audiovisual-content		Base type for movies (video with optional audio or other tracks).
public.video (kUTTypeVideo)	public.movie		Base type for video (no audio).
com.apple.quicktime-movie (kUTTypeQuickTimeMovie)	public.movie	'MooV', .mov, .qt, video/quicktime	QuickTime movie.
public.avi	public.movie	.avi, .vfw, 'Vfw ', video/avi, video/msvideo, video/x-msvideo	AVI movie.

Identifier (Constant)	Conforms to	Tags	Comments
public.mpeg (kUTTypeMPEG)	public.movie	'MPG ', 'MPEG', .mpg, .mpeg, .m75, .m15, video/mpg, video/mpeg, video/x-mpg, video/x-mpeg	MPEG-1 or MPEG-2 content.
public.mpeg-4 (kUTTypeMPEG4)	public.movie	'mpg4', .mp4, video/mp4, video/mp4v	MPEG-4 content.
public.3gpp	public.movie	.3gp, .3gpp, '3gpp', video/3gpp, audio/3gpp	3GPP movie.
public.3gpp2	public.movie	.3g2, .3gp2, '3gp2', video/3gpp2, audio/3gpp2	3GPP2 movie.
public.audio (kUTTypeAudio)	public.audiovisual-content		Base type for audio (no video).
public.mp3 (kUTTypeMP3)	public.audio	'MPG3', 'mpg3', 'Mp3 ', 'MP3 ', 'mp3!', 'MP3!', .mp3, audio/mpeg, audio/mpeg3, audio/mpg, audio/mp3, audio/x-mpeg, audio/x-mpeg3, audio/x-mpg, audio/x-mp3	MPEG-3 audio.
public.mpeg-4-audio (kUTTypeMPEG4Audio)	public.audio, public.mpeg4	'M4A ', .m4a	MPEG-4 audio.
com.apple.protected-mpeg-4-audio (kUTTypeAppleProtectedMPEG4Audio)	public.audio	'M4P ', 'M4B ', .m4p, .m4b	Protected MPEG-4 audio. (iTunes music store format)
public.ulaw-audio	public.audio	.au, .ulw, .snd, 'ULAW', audio/basic, audio/au, audio/snd	μLaw audio.
public.aifc-audio	public.audio	.aifc, .aiff, .aif, 'AIFC', audio/aiff, audio/x-aiff	AIFF-C audio.
public.aiff-audio	public.audio	.aiff, .aif, 'AIFF', audio/aiff, audio/x-aiff	AIFF audio.
com.apple.coreaudio-format	public.audio	.caf, 'caff'	Core Audio format.
public.directory (kUTTypeDirectory)	public.item		Base type for directories.
public.folder (kUTTypeFolder)	public.directory		A plain folder (that is, not a package).

Identifier (Constant)	Conforms to	Tags	Comments
public.volume (kUTTypeVolume)	public.folder		A volume.
com.apple.package (kUTTypePackage)	public.directory		A package (that is, a directory presented to the user as a file).
com.apple.bundle (kUTTypeBundle)	public.directory	'BNDL', .bundle	A directory with an internal structure specified by Core Foundation Bundle Services. .
public.executable	-		Base type for executable data.
com.apple.application (kUTTypeApplication)	public.executable		Base type for applications and other launchable files.
com.apple.application-bundle (kUTTypeApplication-Bundle)	com.apple.package, com.apple.bundle, com.apple.application	'APPL', .app	Application bundle.
com.apple.application-file (kUTTypeApplication-File)	com.apple.application public.data	'APPL'	Application file.
com.apple.deprecated-application-file	com.apple.application-file	'APPC', 'APPD', 'APPE', 'appe', 'CDEV', 'cdev', 'dfil'	Deprecated application file.
com.apple.plugin	com.apple.bundle, com.apple.package	.plugin	Plugin.
com.apple.metadata-importer	com.apple.plugin	.mdimporter	Spotlight importer plugin.
com.apple.dashboard-widget	com.apple.bundle, com.apple.package	.wdgt	Dashboard widget.
public.cpio-archive	public.data	.cpio	CPIO archive.
com.pkware.zip-archive	public.data, public.archive	.zip, application/zip	Zip archive.
com.apple.webarchive (kUTTypeWebArchive)	public.data, public.composite-content		Web Kit webarchive format.

Identifier (Constant)	Conforms to	Tags	Comments
<code>com.apple.framework</code> (<code>kUTTypeFramework</code>)	<code>com.apple.bundle</code>	'FMWK', <code>.framework</code>	Framework.
<code>com.apple.rtf</code> (<code>kUTTypeRTFD</code>)	<code>com.apple.package</code> , <code>public.composite-content</code>	<code>.rtfd</code>	Rich Text Format Directory. That is, Rich Text with content embedding, on-disk format.
<code>com.apple.flat-rtfd</code> (<code>kUTTypeFlatRTFD</code>)	<code>public.data</code> , <code>public.composite-content</code>	NeXT RTFD pasteboard type, <code>NSRTFDPBoardType</code>	Rich Text with content embedding, pasteboard format.
<code>com.apple.resolvable</code> (<code>kUTTypeResolvable</code>)	-		Items that the Alias Manager can resolve.
<code>public.symlink</code> (<code>kUTTypeSymLink</code>)	<code>public.item</code> , <code>com.apple.resolvable</code>		UNIX-style symlink.
<code>com.apple.mount-point</code> (<code>kUTTypeMountPoint</code>)	<code>public.item</code> , <code>com.apple.resolvable</code>		A volume mount point
<code>com.apple.alias-record</code> (<code>kUTTypeAliasRecord</code>)	<code>public.data</code> , <code>com.apple.resolvable</code>	'alis'	Alias record.
<code>com.apple.alias-file</code> (<code>kUTTypeAliasFile</code>)	<code>public.data</code> , <code>com.apple.resolvable</code>		Alias file.
<code>public.font</code>	<code>public.data</code>		Base type for fonts.
<code>public.trueType-font</code>	<code>public.font</code>		TrueType font.
<code>com.adobe.postscript-font</code>	<code>public.font</code>		PostScript font.
<code>com.apple.trueType-datafork-suitcase-font</code>	<code>public.trueType-font</code>	<code>.dfont</code> , <code>'dfon'</code>	TrueType data fork font.
<code>public.opentype-font</code>	<code>public.font</code>	<code>.otf</code> , <code>'OTTO'</code>	PostScript OpenType font.
<code>public.trueType-ttf-font</code>	<code>public.trueType-font</code>	<code>.ttf</code>	TrueType OpenType font.
<code>public.trueType-collection-font</code>	<code>public.font</code>	<code>.ttc</code> , <code>'ttcf'</code>	TrueType collection font.
<code>com.apple.font-suitcase</code>	<code>public.font</code>	<code>.suit</code> , <code>'FFIL'</code> , <code>'ffil'</code> , <code>'sfnt'</code> , <code>'tfil'</code>	Font suitcase.

Identifier (Constant)	Conforms to	Tags	Comments
com.adobe.postscript-lwfn-font	com.adobe.postscript-font	'LWFN'	PostScript Type 1 outline font.
com.adobe.postscript-pfb-font	com.adobe.postscript-font	.pfb	PostScriptType1 outline font.
com.adobe.postscript.pfa-font	com.adobe.postscript-font	.pfa	PostScriptType 1 outline font.
com.apple.colorsync-profile	public.data	.icc, .icm, .pf, 'prof'	ColorSync profile.

Table 3-2 lists UTIs used to identify alternate tags. You use these to specify alternate methods of tag identification in UTI declarations.

Table 3-2 Uniform type identifiers for alternate tags

Identifier	Conforms to	Comments
public.filename-extension	public.case-insensitive-text	Filename extension.
public.mime-type	public.case-insensitive-text	MIME type.
com.apple.ostype	public.text	Four-character code (type OSType).
com.apple.nspboard-type	public.text	NSPasteboard type.

Table 3-3 lists third-party UTIs that the system redeclares as imported types.

Table 3-3 Imported uniform type identifiers

Identifier (Constant)	Conforms to	Tags	Comments
com.adobe.pdf (kUTTypePDF)	public.data, public.composite-content	'PDF ', .pdf, application/pdf, Apple PDF pasteboard type	PDF data.
com.adobe.postscript	public.data	.ps, application/postscript	PostScript data.
com.adobe.encapsulated-postscript	com.adobe.postscript	.eps, NeXT Encapsulated PostScript v1.2 pasteboard type	Encapsulated PostScript.
com.adobe.photoshop-image	public.image	.psd, '8BPS, ' image/x-photoshop, image/photoshop, image/psd, application/photoshop	Adobe Photoshop document.
com.adobe.illustrator.ai-image	public.image	.ai	Adobe Illustrator document.

Identifier (Constant)	Conforms to	Tags	Comments
com.compuserve.gif (kUTTypeGIF)	public.image	'GIFf', .gif, image/gif	GIF image.
com.microsoft.bmp (kUTTypeBMP)	public.image	'BMP ', 'BMPf', .bmp	Windows bitmap image.
com.microsoft.ico (kUTTypeICO)	public.image	.ico	Windows icon image.
com.microsoft.word.doc	public.data	'W8BN', .doc, application/msword	Microsoft Word data.
com.microsoft.excel.xls	public.data	'XLS8', .xls, application/vnd.ms-excel	Microsoft Excel data.
com.microsoft.powerpoint.ppt	public.data, public.presentation	.ppt, 'SLD8', application/mspowerpoint	Microsoft PowerPoint presentation.
com.microsoft.waveform-audio	public.audio	.wav, .wave, '.WAV', 'WAVE', audio/wav, audio/wave	Waveform audio.
com.microsoft.advanced-systems-format	public.audiovisual-content	.asf, 'ASF_', video/x-ms-asf	Microsoft Advanced Systems format.
com.microsoft.windows-media-wm	public.movie, com.microsoft.advanced-systems-format	.wm, video/x-ms-wm	Windows media.
com.microsoft.windows-media-wmv	public.movie, com.microsoft.advanced-systems-format	.wmv, video/x-ms-wmv	Windows media.
com.microsoft.windows-media-wmp	public.movie, com.microsoft.advanced-systems-format	.wmp, video/x-ms-wmp	Windows media.
com.microsoft.windows-media-wma	public.audio, com.microsoft.advanced-systems-format	.wma, video/x-ms-wma	Windows media audio.
com.microsoft.advanced-stream-redirector	public.xml, public.audiovisual-content	.asx, 'ASX_', video/x-ms-asx	Advanced Stream Redirector.
com.microsoft.windows-media-wmx	public.audio, com.microsoft.advanced-stream-redirector	.wmx, video-x-ms-wmx	Windows media.
com.microsoft.windows-media-wvx	public.audio, com.microsoft.advanced-stream-redirector	.wvx, video-x-ms-wvx	Windows media.

Identifier (Constant)	Conforms to	Tags	Comments
com.microsoft.windows-media-wax	public.audio, com.microsoft.advanced-stream-redirector	.wax, video-x-ms-wax	Windows media audio.
com.apple.keynote.key	com.apple.package, public.presentation	.key	Apple Keynote document.
com.apple.keynote.kth	com.apple.package, public.composite-content	.kth	Apple Keynote theme.
com.truevision.tga-image	public.image	.tga, 'TPIC', image/targa, image/tga, application/tga	TGA image.
com.sgi.sgi-image	public.image	.sgi, '.SGI', image/sgi	Silicon Graphics image.
com.ilm.openexr-image	public.image	.exr	OpenEXR image.
com.kodak.flashpix.image	public.image	.fpx, image/fpx, application/vnd.fpx	FlashPix image.
com.j2.jfx-fax	public.fax	.jfx	J2 fax.
com.js.efx-fax	public.fax	.efx, image/efax	eFax fax.
com.digidesign.sd2-audio	public.audio	.sd2, 'Sd2f'	Digidesign Sound Designer II audio.
com.real.realmedia	public.movie	.rm, 'PNRM', application/vnd.rn-realmedia	RealMedia.
com.real.realaudio	public.audio	.ram, .ra, 'PNRA', audio/vnd.rn-realaudio, audio/x-pn-realaudio	RealMedia audio.
com.real.smil	public.xml	.smil, application/smil	Real synchronized multimedia integration language.
com.allume.stuffit-archive	public.data, public.archive	.sit, .sitx, application/x-stuffit, application/x-sit, application/stuffit	Stuffit archive.

Document Revision History

This table describes the changes to *Uniform Type Identifiers Overview*.

Date	Notes
2008-04-08	Added information about the UTI character set.
2007-10-31	Made minor technical and editorial corrections.
2005-11-09	Fixed typographical errors. Clarified usage of UTTypeConformsTo. Added public.archive to "conforms to" list for com.pkware.zip-archive.
2005-06-04	Updated list of system and imported UTIs. Made corrections and updates for Mac OS X v10.4, including additional conformance information.
2005-04-29	Changed title from "Understanding Uniform Type Identifiers." First public version.
2004-06-28	First seed release.

REVISION HISTORY

Document Revision History